



3D STUB INSPECTION VISION SYSTEM ALUMINIUM SMELTER

The 3D Stub Inspection Vision System sorts out anodes needing alignment and repair.



Anode ready for stub alignment

MEASURED VALUES

Each stub is checked for:

- Cowboy effect
- Too short stubs
- Too long stubs
- Corrosion and remains of bath, coal and iron

This is obtained by measuring in mm:

- Stub position
- Stub length
- Minimum diameter in upper region
- Maximum diameter in upper region
- Maximum diameter in lower region

For more information:

Tordivel AS
Phone +47 2315 8700
Fax +47 2315 8701
office@tordivel.com
www.scorpionvision.com




Scorpion Vision Software® is a registered trademark of Tordivel AS.
© 2008-2011 Tordivel AS

CLASSIFICATION

based on the measured values, the system classifies each anode in one of the following states:

- ANODE OK
- ANODE SHOULD BE ALIGNED
- ANODE TO ALIGNMENT
- ANODE TO REPAIR
- ANODE TO REPAIR AND ALIGNMENT
- CAN NOT MEASURE

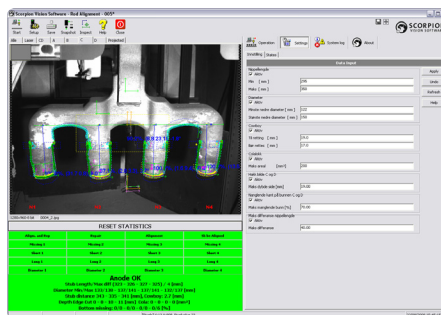

The system operator can set the sorting limit for each measurement defining the system classification.

RESULTS

The system displays the following information on screen, for each anode:

- The classification state
- The measured values

In addition the system has the following features:

- Real time presentation of camera images with fault indication
- Curves for all measured parameters
- Pareto, a pareto distribution is available for the classification states
- A classification counter



Inspection result with measured values and Pareto graph.

For all vision tasks, the software of choice is Scorpion Vision Software®. Scorpion is an independent, configurable and open software tool for industrial vision. It is ideal for increased automation and improved quality in production output.

TECHNICAL DATA

EQUIPMENT


19" cabinet IP56 and cooling device, Industrial Computer, Color Touch Screen, Scorpion Vision Software, two digital cameras, two halogen lamps, two multi line lasers, Devicenet interface, Ethernet connection for remote control

CABINET DIMENSION

W=19", L=600 mm, H = 2000 mm

MEASUREMENT AREA

W=2500, L=6000, H=2500 mm

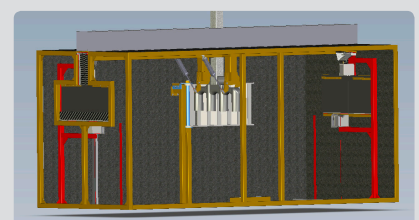

Other configuration upon request.

MEASUREMENT CYCLE TIME

15-20 SEC